



PMC-53A

Intelligent Multifunction Meter



- IEC 62053-22 Class 0.2S^{*}/Class 0.5S
- ANSI C12.20 Class 0.2
- MID Class C Certified
- True RMS @ 128^{*} Samples/Cycle
- THD with 63rd* Ind. Harmonics
- K-Factor, Crest Factor and TDD
- Unbalance & Phase Angle
- Multi-Tariff TOU & Demands
- Max./Min. Log with Timestamps
- Modbus RTU, BACnet MS/TP, Metasys N2 and DNP 3.0
- Large, Backlit Dot-Matrix LCD
- 1-Cycle Real-Time WF display
- Optional 16MB Log Memory for 100 days recording at 15 minutes
- 12 Monthly Energy Log & SOE Log
- I/O Expansion Capabilities
- IP65 Enclosure with No Openings
- Standard Tropicalization
- Industrial Grade Components
- Extended Operating Temperature
- Extended Warranty

*The PMC-53A V2 and later versions support the selection of Class 0.2S accuracy model and feature enhanced capabilities, including an upgrade from 31st to 63rd individual harmonics, a sampling upgrade from 64 Sample/Cycle to 128 Sample/Cycle true RMS, and an expansion of log memory from 4MB to 16MB.

Designed For Reliability

Manufactured To Last



Intelligent Multifunction Meter



The PMC-53A Intelligent Multifunction Meter is CET's latest offer for the low-cost digital power/energy metering market. The PMC-53A features quality construction, multifunction measurements and a large, backlit, Dot-Matrix LCD display that is easy to navigate and user friendly. Housed in a standard DIN form factor measuring 96x96x83.6mm, it is perfectly suited for industrial, commercial and utility applications. Compliance with the IEC 62053-22 Class 0.2S/0.5S, ANSI C12.20 Class 0.2 and EN 50470-1/3 Class C, it is a cost-effective replacement for analog instrumentation and is capable of displaying 4 measurements at once. It optionally provides I4 input for Neutral Current measurement, a second RS-485 port, up to six Digital Inputs for status monitoring, pulse counting or Tariff switching, up to four Relay Outputs for control and alarm applications, up to two Solid State Relays for energy pulsing as well as other I/O options for different applications.

Typical Applications

- Industrial, Commercial and Utility Substation Metering
- Building, Factory and Process Automation
- Sub-metering and Cost Allocation
- Energy Management and Power Quality Monitoring

Features Summary

Basic Measurements

- ULN, ULL per Phase and Average with calculated Neutral-to-Ground Voltage (Ung)
- Current per Phase and Average with calculated Neutral
- Current Loading Factor per Phase and Average
- P, Q, S, PF per Phase and Total
- kWh/kvarh Import/Export/Net/Total and kVAh Total
- Frequency
- Device Operating Time (Running Hours)
- Optional I4 measurements
- Calculated Residual Current Ir (with optional I4 Input)

Advanced Measurements

- 1-cycle Real-time U & I Waveform Display @ 1s update rate
- U and I THD, TOHD, TEHD and Individual Harmonics up to 63rd*
- Current TDD, TDD Odd, TDD Even, K-Factor and Crest Factor
- U and I Phase Angle
- U Over/Under Deviation and Frequency deviation*
- Displacement PF
- Fundamental U, I and P per Phase
- Total Fundamental P & Total Harmonic P
- U and I Unbalance and Sequence
- kvarh Q1-Q4
- Interval Energy for kWh/kvarh Import/Export and kVAh
- Demands, Predicted Demands and Max. Demands for P/Q/S Total, I per Phase and Average as well as ULL Average with Timestamp for This Month (or Since Last Reset) and Last Month (or Before Last Reset)
- Two TOU schedules, each providing
 - 12 Seasons
 - 20 Daily Profiles, each with 12 Periods*
 - 90 Holidays or Alternate Days
 - 8 Tariffs, each providing the following information
 - Total and 3-phase kWh/kvarh Import/Export, kVAh
 - P/Q/S Max. Demands
- 12 monthly recording of kWh/kvarh Import/Export/Total/Net, kVAh, kvarh Q1-Q4 as well as kWh/kvarh Import/Export and kVAh per Tariff

*These features are upgraded in the PMC-53A V2 and later versions.

Ease of use

- Large, backlit, Dot-Matrix LCD display with wide viewing angle
- Intuitive user interface
- LED indicators for Energy Pulsing and Communication activities
- Password-protected setup via Front Panel or free configuration software
- Easy installation with mounting clips, no tools required

Setpoints

- 9 user programmable setpoints with extensive list of monitoring parameters including Voltage, Current, Power and THD, etc.
- Configurable thresholds, time delays and DO triggers

SOE Log

- 100 events time-stamped to ± 1 ms resolution
- Setup changes, Setpoint and DI status changes and DO operations

Max./Min. Log

- Max./Min. Log with Timestamp for Real-time measurements such as Voltage, Current, In, I4, Freq., P, Q, S, PF, Unbalance, K-Factor, Crest Factor and THD.
- Configurable for This Month & Last Month (or Since Last Reset & Before Last Reset)

Freeze Logs (Optional)

- 60 Daily Freeze Logs for kWh/kvarh/kVAh Total and P/Q/S Max. Demands
- 36 Monthly Freeze Logs for kWh/kvarh/kVAh Total and P/Q/S Max. Demands with Timestamp

Data Recorder Log (Optional)

- 5 Data Recorders of 16 parameters each for Real-time measurements, Harmonics, Energy, Demand, TOU, Pulse Counters, etc.
- Recording interval from 1 minute to 40 days
- Configurable capacity up to a max. of 100 days at 15-minute interval

Diagnostics

- Frequency Out-of-Range, Loss of Voltage/Current
- P Direction per Phase and Total, Incorrect CT Polarity
- Incorrect U & I Phase Sequence

Communications

- Optically isolated RS-485 port at max. 38,400 bps
- Selectable Modbus RTU, BACnet MS/TP, Metasys N2 and DNP 3.0
- Optional 2nd comm. port with RS-485 Modbus RTU / PROFIBUS DP* support

Real-Time Clock

- Battery-backed Real-time Clock with 25ppm accuracy (<2s per day)

System Integration

- Supported by CET's PecStar® iEMS and iEEM
- Easy integration into Johnson Controls Metasys with N2 or other Building Automation Systems with BACnet MS/TP or Modbus RTU
- DNP 3.0 for Utility Substation Automation

Inputs and Outputs

Digital Inputs (Optional)

- Up to 6 channels, volt free dry contact, 24VDC internally wetted
- 1000Hz sampling for status monitoring with programmable debounce
- Pulse counting with programmable weight for each channel for collecting WAGES (Water, Air, Gas, Electricity, Steam) information
- Tariff switching based on DI status

Digital Outputs (Optional)

- Up to 4 Form A mechanical relays for alarming and general purpose control

Pulse Outputs (Optional)

- Up to 2 Form A Solid State Relays for kWh and kvarh pulsing

Expansion Modules

Expansion Module A Options

- I4 Input
- 2nd comm. port with optical isolation, supporting Modbus RTU/PROFIBUS DP*

Expansion Module B Options

- 2xDigital Input and 2xRelay Output
- 2xRTD Input (PT100 sensors not included)
- 1xAI and 1xAO (0/4-20mA)
- 2xAO (0/4-20mA)*

Designed For Reliability

Manufactured To Last




Intelligent Multifunction Meter

Technical Specifications

Accuracy

Parameters	Accuracy		Resolution
	Class 0.2S	Class 0.5S	
Voltage	±0.1%	±0.2%	0.001V
Current	±0.1%	±0.2%	0.001A
I4 (measurement)	±0.1%	±0.2%	0.001A
P, Q, S	±0.2%	±0.5%	0.001kX
kWh, kVAh	IEC 62053-22 Class 0.2S IEC 62053-22 Class 0.5S ANSI C12.20 Class 0.2 EN 50470-1/3: 2006 Class C		0.1kXh
kvarh	IEC 62053-24 Class 0.5S IEC 62053-23 Class 2		0.1kvarh
PF	±0.5%		0.001
Frequency	±0.02Hz		0.01Hz
THD	IEC 61000-4-7 Class II		0.01%
K-Factor	IEC 61000-4-7 Class II		0.001
Phase Angle	±1°		0.1°

Device View and Dimensions

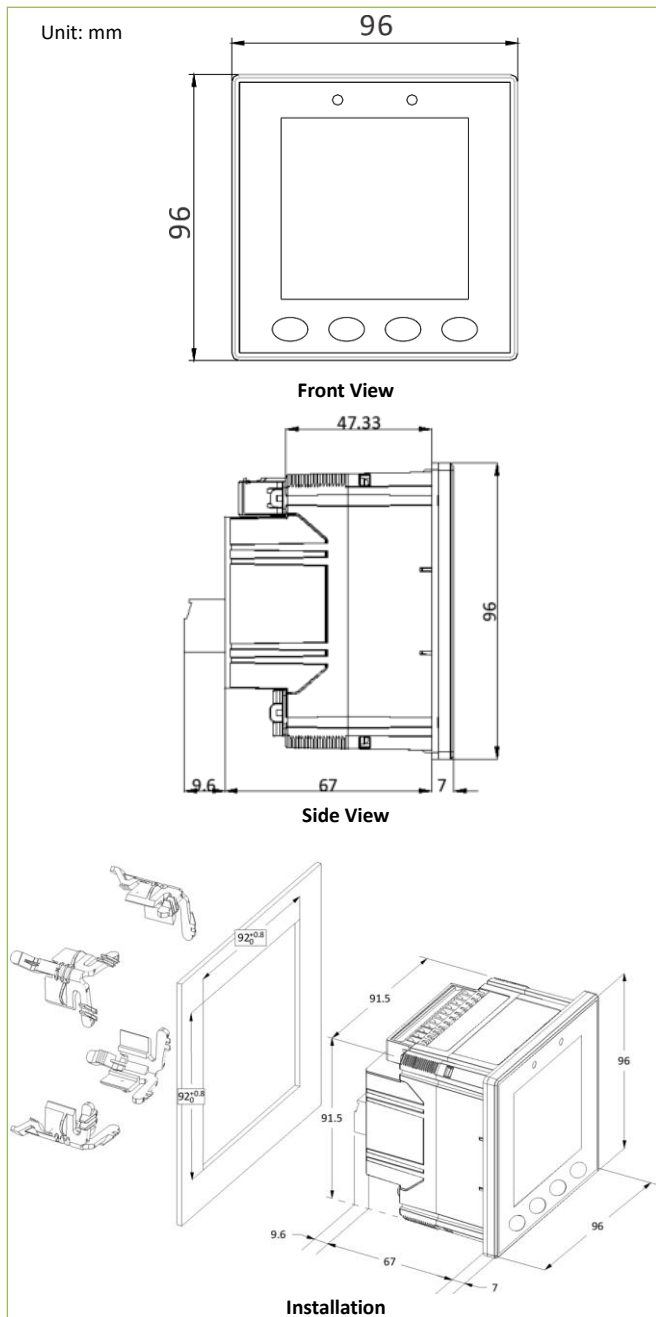

Voltage Inputs (V1, V2, V3, VN)	
Standard Un	400VLN/690VLL
Range	10V to 1.2Un
Overload	1.2xUn continuous, 2xUn for 1s
Burden	<0.02VA per phase
Measurement Category	CAT III 600V
Frequency	45-65Hz
Current Inputs (I11, I12, I21, I22, I31, I32)	
Standard In	5A (Optional 1A)
Range	0.1% to 200% In
Starting Current	0.1% In
Overload	2xIn continuous, 20xIn for 1s
Burden	<0.15VA per phase @ 5A
Optional I4 Input (I41, I42)	
In	5A (5A/1A Auto-Scaling)
Range	0.1% to 200% In
Starting Current	0.1% In
Power Supply (L/+, N/-)	
Standard	60-250VAC ±10%, 47-440Hz
Burden	24-250VDC ± 10%
Overvoltage Category	<6W OVC III up to 300VLN
Digital Inputs (DI1, DI2, DI3, DI4, DIC)	
Type	Dry contact, 24VDC internally wetted
Sampling	1000Hz
Hysteresis	1ms minimum
Digital Outputs (DO11, DO12, DO21, DO22)	
Type	Form A Mechanical Relay
Loading	5A @ 250VAC or 30VDC
Load Type	Resistive
Pulse Outputs (E1+, E1-, E2+, E2-)	
Type	Form A Solid State Relay
Isolation	Optical
Load Type	Resistive
Output	Optocoupler output as ON-OFF
Max. Load Voltage	50VDC
Max. Forward Current	50mA
Optional Analog Input	
Type	0/4-20 mA
Overload	24mA
Optional Analog Outputs	
Type	0/4-20 mA DC
Loading	500Ω maximum
Overload	24mA maximum
Optional RTD Inputs	
Type	Platinum Resistor PT100 (Sensor Not Included)
Range	-50°C to 200°C
Cable Length	3000mm
Protective Tube Length	30mm
Installation Torque	
Current Inputs	12lb-in (1.3N.m)
Power Supply, Voltage Inputs, RS-485 and I/O	5lb-in (0.5N.m)
Environmental Conditions	
Operating Temp.	-25°C to 70°C
Storage Temp.	-40°C to 85°C
Humidity	5% to 95% non-condensing
Atmospheric Pressure	70 kPa to 106 kPa
Altitude	<2000m
Pollution Degree	2
Location / Mounting	For indoor use only
Mechanical Characteristics	
Panel Cutout	92x92mm (3.62"x3.62")
Unit Dimensions	96x96x83.6mm
IP Rating	IP65

Designed For Reliability

Manufactured To Last



Intelligent Multifunction Meter

Ordering Information

Standards of Compliance


Safety Requirements	
CE LVD 2014 / 35 / EU	EN61010-1: 2010+A1: 2019
cULus Listed	EN IEC 61010-2-030: 2021+A11:2021
	UL 61010-1, Ed.3, Rev 06/06/2023
	CAN/CSA C22.2 NO. 61010-1, Ed.3
	UL 61010-2-030, Ed.2
MID per 2014/32/EU	CSA C22.2 NO. 61010-2-030:18, Ed.2
	EN 50470-1: 2006
	EN 50470-3: 2006
Electrical Safety in Low Voltage Distribution Systems up to 1000 Vac and 1500 Vdc	IEC 61557-12: 2021 (PMD)
Insulation	EN61010-1: 2010+A1: 2019
	IEC 62052-31: 2015
AC Voltage: 3.6kV @ 1 minute	
Insulation Resistance: >100MΩ	
Impulse Voltage: 6kV, 1.2/50μs	
Electromagnetic Compatibility	
CE EMC Directive 2014 / 30 / EU (EN IEC 61326-1: 2021)	
Immunity Tests	
Electrostatic Discharge	EN 61000-4-2: 2009
Radiated Fields	EN IEC 61000-4-3: 2020
Fast Transients	EN 61000-4-4: 2012
Surges	EN 61000-4-5: 2014+A1: 2017
Conducted Disturbances	EN 61000-4-6: 2014+AC: 2015
Magnetic Fields	EN 61000-4-8: 2010
Voltage Dips and Interruptions	EN IEC 61000-4-11: 2020
Ring Wave	EN 61000-4-12: 2017
Emission Tests	
Limits and Methods of Measurement of Electromagnetic Disturbance Characteristics of Industrial, Scientific and Medical (ISM) Radio-Frequency Equipment	EN 55011: 2016+A1: 2017+A2: 2021
Electromagnetic Compatibility of Multimedia Equipment - Emission Requirements	EN 55032: 2015+AC: 2016+A11: 2020
Limits for Harmonic Current Emissions for Equipment with Rated Current ≤16 A	EN IEC 61000-3-2: 2019+A1: 2021
Limitation of Voltage Fluctuations and Flicker in Low-Voltage Supply Systems for Equipment with Rated Current ≤16 A	EN 61000-3-3: 2013+A1: 2019+A2: 2021
Emission Standard for Industrial Environments	EN 61000-6-4: 2019
Radiated Emissions	FCC 47CFR 15.109 Class B
Conducted Emissions	FCC 47CFR 15.107 Class B
Mechanical Tests	
Spring Hammer Test	IEC 62052-31: 2015
Vibration Test	IEC 62052-11: 2020
Shock Test	IEC 62052-11: 2020
Revenue Metering Type Test Approval	
MID per EU Directive 2014/32/EU	Certificate No.: 0120/SGS0427
NMIM of Malaysia per OIML R46	Approval No.: ATS-0026-20
BACnet Conformance Certificate	
BTL Listing	Certificate No.: BTL-31239

CET Electric Technology Inc.

E: sales@cet-global.comW: www.cet-global.com

Version 20250428	
Product Code	Description
PMC-53A Intelligent Multifunction Meter	
Basic Function*	
1	Dot-Matrix LCD, 1xRS-485 with Multiple Protocol, Monthly Energy Log
2*	Model 1 + Monthly & Daily Freeze Log, Data Recording Log, 16MB Memory
3*	Model 1 + 4xDI + 2xSS Pulse Output
A*	Model 1 + 4xDI + 2xDO (Mechanical Relay)
B*	Model A + Monthly & Daily Freeze Log, Data Recording Log, 16MB Memory
Input Current	
5	5A (5A/1A Auto-Scaling)
1	1A
Input Voltage	
9	400VLN/690VLL
Power Supply	
2	60-250 VAC ± 10%, 47-440Hz
	24-250 VDC ± 10%
Frequency	
5	45Hz-65Hz
Language	
E	English
Expansion A*	
A1	1xRS-485 / 1xPROFIBUS DP
A2^	I4
Expansion B*	
B1	2xDI + 2xDO (Mechanical Relay)
B2	2xRTD (PT100 sensors not included)
B3	1xAI + 1xAO (0/4-20mA)
B5	2xAO
Accuracy	
2*	Class 0,25 for Active Energy
**	Class 0,5S for Active Energy
PMC-53A - 1 5 9 2 5 E - - - 2	PMC-53A-15925E-2 (Class 0,25 Standard Model)
PMC-53A - 1 5 9 2 5 E - - - -	PMC-53A-15925E (Class 0,5S Standard Model)
* Additional charges apply	
^ Models PMC-53A-X5925E (X=1, 2, 3, A, B) are certified for MID Class C.	
^ I4 specifications of Expansion A2 are consistent with those of the selected Input Current Option.	
1) Model No. with no Expansion A or B can be written as PMC-53A-15925E-X (X=2 or Null)	
2) Model No. with only one Expansion can be written as PMC-53A-15925E-Ax-X or PMC-53A-15925E-Bx-X (X=2 or Null)	
3) Model No. with both Expansions can be written as PMC-53A-15925E-Ax-Bx-X (X=2 or Null)	
4) Options B1 for Expansion B are invalid with options 1 and 2 under Basic Function.	

Terminals Diagram

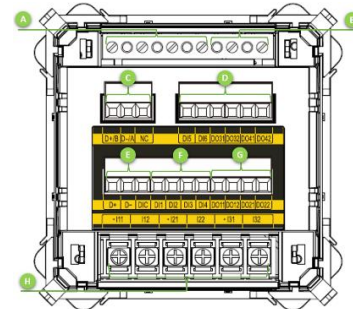

A	3xVoltage Input	B	Power Supply
C	Expansion Module A	D	Expansion Module B
E	1xRS-485 Port	F	4xDigital Input
G	2xDigital Output	H	3xCurent Input

Your Local Representative

Revision Date: May 14, 2025

Designed For Reliability

Manufactured To Last